



Thermal Transfer / Thermal Direct 1D & 2D Barcode Label Printer

BLP-410

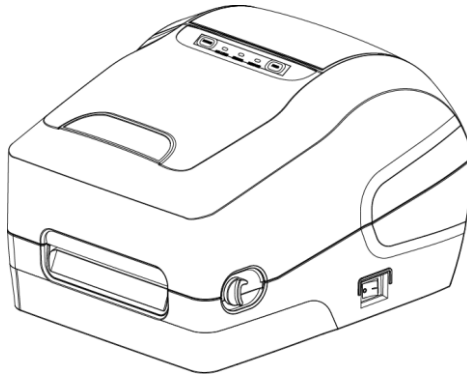

- **Dimensions**

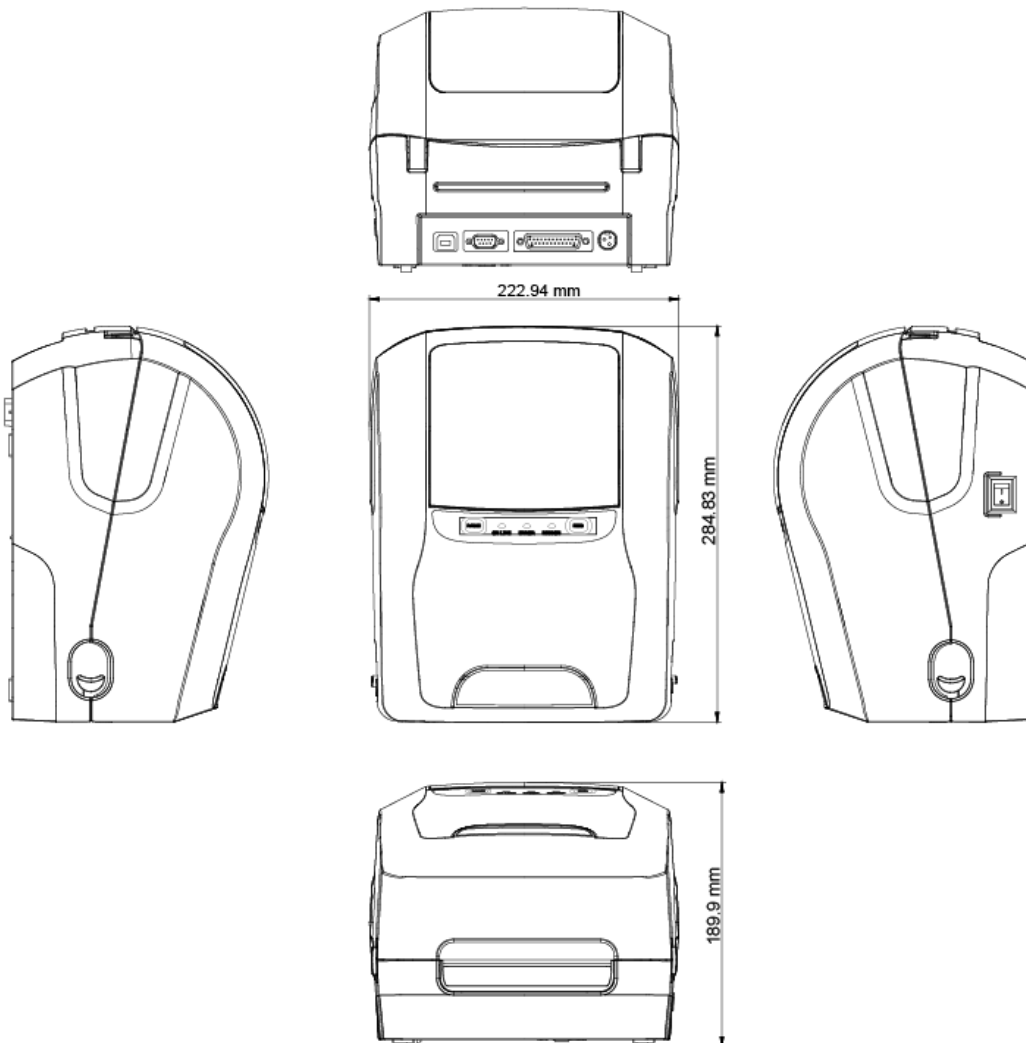

- Specifications

Model		BLP-410
Print Capabilities		
Print Method	Thermal Transfer / Direct Thermal	
Print Speed	2~6 inches/sec	
Print Head Lifecycle	50 Km	
Print Resolution	203dots/inch(8dots/mm)	
Maximum Print Width	108mm (4.25 inches)	
Maximum Print Length	2286 mm (90 inches)	
Print Font Character Support	English, Simplified Chinese, Traditional Chinese, Korean	
Barcode Support	1D	EAN-8, EAN-13, EAN 128, EAN 14, EAN and UPC 2(5) digits add-on, Codabar, Code 39, Code93, Code 128 subsets A/B/C, China Postage, ITF, MSI, MSIC, PLESSEY, ITF 14, UPC-A, UPC-E
	2D	QR Code
Image Printing Format	BMP, PCX	
interface	USB 2.0, Parallel, RS-232 (DB9 Female)	
System Support	Win 7, Win 8, Win 10	
General		
Power Input	+24VDC/2.0A (with External Adapter 100~240VAC 50/60Hz)	
Color	Black	
Material	ABS	
Compliance	FCC / CE / WEEE / RoHS	
Weight	2.09 Kg	
Dimension (mm)	222.94 (W) x 190 (H) x 284.83 (D)	
Operating Temperature	5°C~45°C	
Operating Humidity	25% ~ 85% RH non-condensing	
Storage Temperature	-10°C~ 50°C	
Storage Humidity	10% ~ 90% RH non-condensing	



Print Ribbon

The Ribbon Width	110 mm (max.) 30 mm (min.)
Ribbon Diameter	67 mm (max.)
Ribbon Axis Diameter	25.4 mm (1 inch)

Print Label/ Print Paper

Paper Type	Continuous Paper, Gap Of Paper, Paper Folding, Punched Paper
Paper Width	120 mm (4.72 inches, max.) 20 mm (0.78 inch, min.)
Paper Roll Diameter	127 mm (5 inches, max.)
Paper Thickness (tag + bottom paper)	0.254 mm (10 mil, max.) 0.06 mm (2.36 mil, min.)
Paper Roll Axis Diameter	25.4 mm ~ 38 mm (1 inch ~ 1.5 inch)
Label Length	10 ~2286 mm (0.39 inch ~ 90 inches)
Label Gape Spacing	2 mm (0.09 inch, min.)

