

## Modular POS System

### TP-8515



- Features**



15" Projective Capacitive Touch LCD Monitor



Simple 1-Screw HDD Replacement



Easy-Removable Motherboard Tray



Optional Secondary LCD Display




Modular Peripherals: (MSR, i-Button, RFID, Finger Print..etc.)




Stylish & Durable Design




- **Dimensions**

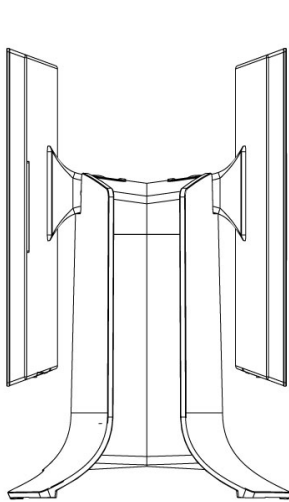


**Left**

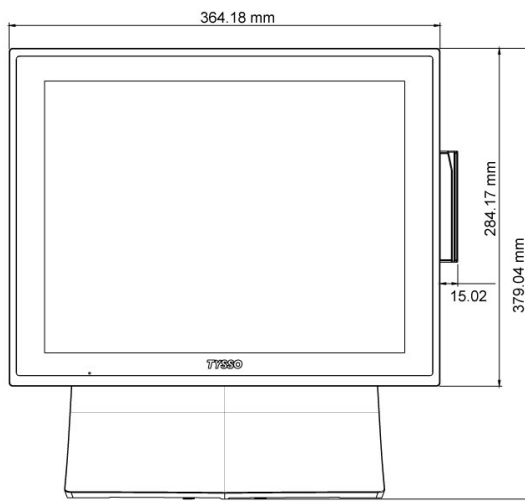


**Front**

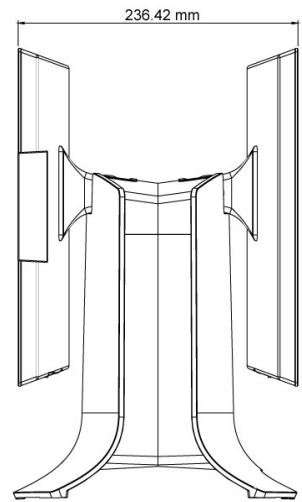


**Right**

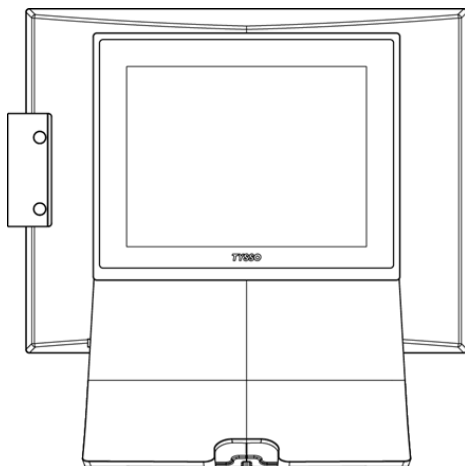

**Rear (2<sup>nd</sup> LCD Display)**

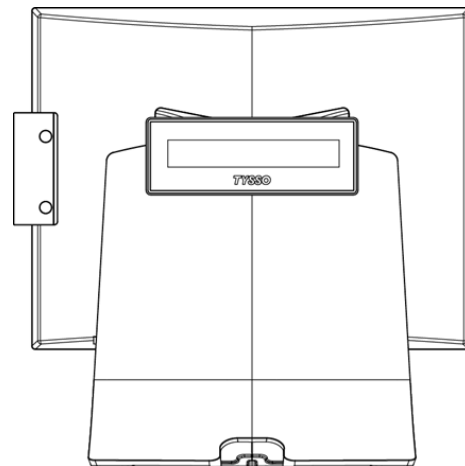

**Rear (VFD Customer Display)**

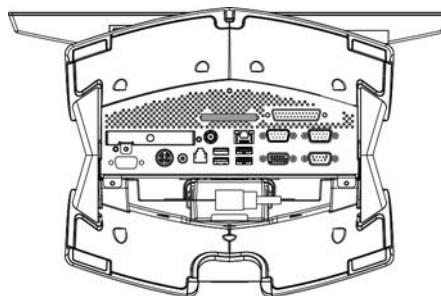

**Bottom**



- Specifications

Model		TP-8515
<b>Main Board</b>		
CPU	Intel® Bay Trail-D Platform, Celeron® Processor J1900 2.0 GHz (2M Cache, up to 2.42 GHz)	
System Memory	1 x DDR3L SO-DIMM Socket, up to 8GB	
Graphic	Intel® HD Graphics	
OS Support	POS Ready 7, Windows 7, Windows 8.1, Windows 10 IOT Entry, Linux	
<b>Display</b>		
Screen Size	15" TFT LCD LED backlight, (Ratio 4:3)	
Resolution	1024 x 768	
Touch Screen	Projective Capacitive Touch, 10 point	
Tilting Angle	90~180 degree	
<b>Storage</b>		
HDD	1 x 2.5" SATA II Bay HDD or SSD	
<b>Interface</b>		
Serial	4 x COM (3 for standard, 1 for optional, DB9 with RI/+5VDC/+12VDC output by jumper)	
Parallel	1 x DB25 Parallel Port (optional)	
USB	5 x USB 2.0 (External, 4 x Bottom, 1 x Screen)	
PCIe	1 x Mini PCIe	
LAN	1 x RJ-45, Giga LAN Support (10/100/1000 Mbps)	
VGA	1 x DB-15, Female (Max Resolution: 1920 x 1080)	
DC Out	1 x +12VDC for 2nd Display / VFD	
DC In	1 x +12VDC	
Cash Drawer	1 x RJ-11, +12VDC/+24VDC by jumper select	
Audio	1 x Line in and 1 x Mic. out	
<b>Others</b>		
Power Adapter	+12V/5A, 60W External Power Adaptor with Cable Head Lock, secured in POS Unit (Power Adaptor: 100VAC~240VAC, 50/60Hz)	
Color	Black / White	
Compliance	FCC/CE/WEEE/RoHS	
Weight	6 kg	
Dimension (mm)	364 (W) x 379 (H) x 236 (D)	
Operating Temperature	0°C~40°C	
Operating Humidity	20% ~ 80% RH non-condensing	
Storage Temperature	-20°C~55°C	
Storage Humidity	20% ~ 85% RH non-condensing	

